



راشف فالتخا رتي م س ن ارت APRE-2000PD and APRE-2000PZ

[Read More](#)

SKU:

Price:


Stock: instock

Categories: [دن مشوه ي راشف فالتخا جنس حطاس](#)

Product Description

لوصح م ي ن ف تاصخ شم

4...20 mA output signal + HART protocol ATEX Intrinsic safety Static pressure limit up to 420 bar Accuracy 0.1% Gold plated diaphragms (Au) Wetted parts material Hastelloy C276

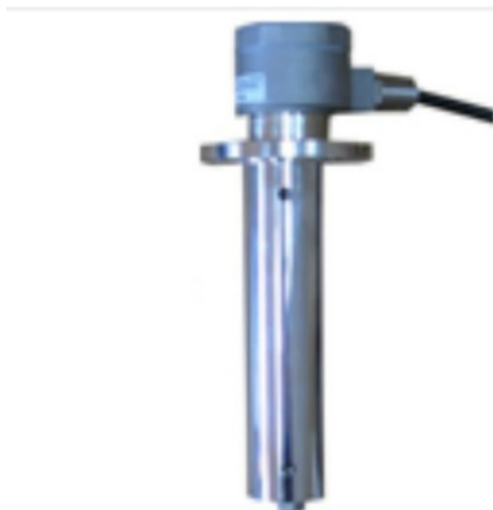

ERH- xx-20 حطاس ي سي طان غم چي ئوس

[Read More](#)

SKU:

Price:

Stock: instock

Categories: [چي ئوس](#)

Product Description

لوصح م ي ن ف تاصخ شم

Min. medium density 0,70 g/cm³ Max. process pressure 1,0 MPa Ambient temperature -25°C...+ 60°C Medium temperature -25°C...+ 80°C Switching points 1,2 or 3 Switching rate 230 V AC; 100VA; 1A 230 V DC; 50W; 0,5A Hysteresis 10mm Ingress Protection IP68 Material of the wet part 316L Material of the dry part aluminum alloy or 316 Floating element Ø40x35mm Protection tube Ø60 Weight of the level switch 0,3...8,5 kg Weight of the cable 0,15 kg/m

ERH لدم حطس چيئوس


[Read More](#)

SKU:

Price:

Stock: instock

Categories: [چيئوس](#)

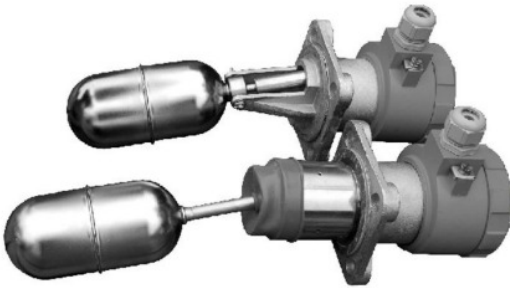

Product Description

لوصح م ىن ف تاصخشم

Explosion proof version Wetted parts material 321SS Housing material: Aluminium or 321SS Housing protection IP66/68 Nominal pressure 40bar Marine certificates (GL, DNV, LR, ABS, BV, PRS)



کیتات س اور دیه جنس حطاس SGE-25 and SGE-16

[Read More](#)

SKU:

Price:

Stock: instock

Categories: [کیتات س اور دیه جنس حطاس](#)

Product Description

لوصح م ی ن ف تاصخشم

Any measurement range from 1 up to 500 m H2O Integrated internal overvoltage protection circuit Marine certificate DNV ATEX Intrinsic safety



کیتات س اور دیه جنس م کارت PG-28.Smart دنم شوه

[Read More](#)

SKU:

Price:

Stock: instock

Categories: [کیتات س اور دیه جنس حطاس](#)

Product Description

لوصح م ی ن ف تاصخشم

Density measuring range 0...1 g/cm³ or 0...2 g/cm³ Accuracy 0,1% Output signal 4...20 mA + HART Static pressure limit 40 bar



يراشف فالتخا جنس حطس APRE-2000PD و APRE-2000PZ دن مشوه

[Read More](#)

SKU:

Price:

Stock: instock

Categories: [دن مشوه یراشف فالتخا جنس حطس](#)

Product Description

لوصح م ی ن ف تاصخشم

4...20 mA output signal + HART protocol ATEX Intrinsic safety Static pressure limit up to 420 bar Accuracy 0.1% Gold plated diaphragms (Au) Wetted parts material Hastelloy C276



يراشف فالتخا جنس حطس APR-2000 ALW دن مشوه

[Read More](#)

SKU:

Price:

Stock: instock

Categories: [دن مشوه یراشف فالتخا جنس حطس](#)

Product Description

لو ص ح م ی ن ف ت ا ص خ ش م

4...20 mA, 0...20 mA or 0...5 mA output signal + HART protocol Digital PROFIBUS PA signal

Display with backlight SIL 2 certificate Intrinsic safety certificate (ATEX, IECEx) Explosion proof

certificate (ATEX, IECEx) PED Conformity (97/23/EC) Programmable zero range, shift,

characteristic and damping ratio with local panel keys Static pressure limit up to 420bar

Accuracy 0,075% (0,05% on request) Marine certificate – DNV, BV Gold plated diaphragms

Wetted parts material Hastelloy C276
